

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
30 May 2002 (30.05.2002)


PCT

(10) International Publication Number  
**WO 02/43341 A2**

- (51) International Patent Classification<sup>7</sup>: H04L 25/02, 25/03, 1/00, 1/20
- (21) International Application Number: PCT/US01/47698
- (22) International Filing Date: 26 October 2001 (26.10.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/243,707 26 October 2000 (26.10.2000) US  
Not furnished 25 October 2001 (25.10.2001) US
- (71) Applicant: INNOVATIVE TECHNOLOGY LICENSING, LLC [US/US]; Mail Code A15, P.O. Box 1085, Thousand Oaks, CA 91358-0085 (US).
- (72) Inventor: CHIEN, Charles; 673 Camino Del Sol, Newbury Park, CA 91320 (US).
- (74) Agents: JOHNSON, William, L. et al.; Koppel & Jacobs, Suite 107, 555 St. Charles Drive, Thousand Oaks, CA 91360 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD OF RECONFIGURATION OF RADIO PARAMETERS FOR POWER-AWARE AND ADAPTIVE COMMUNICATIONS

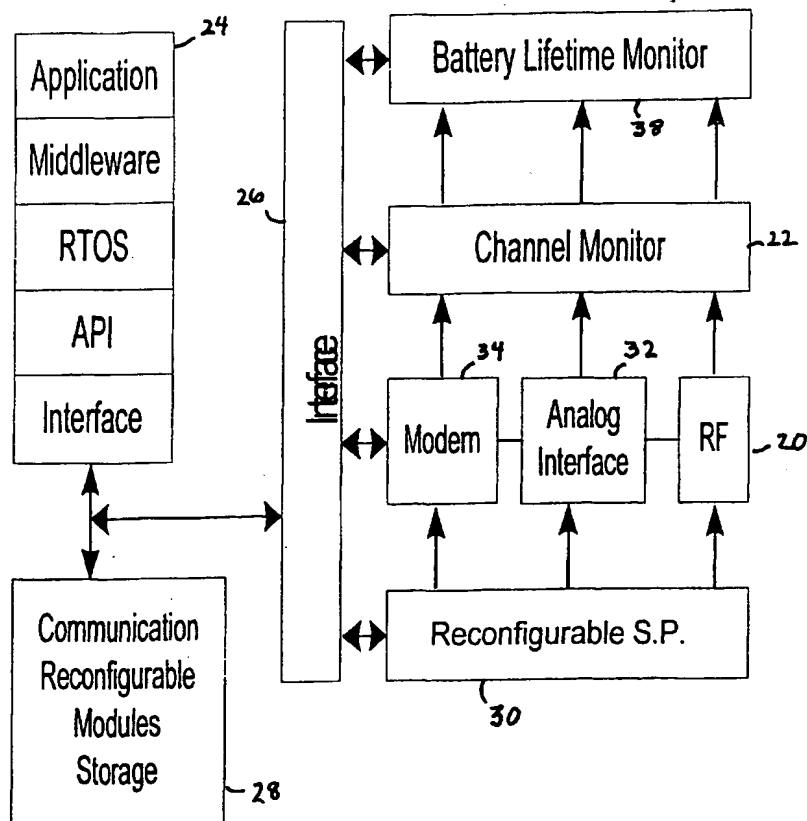

(57) Abstract: The invention monitors a communication channel and estimates its characteristics from time to time, thus providing a dynamic estimate of channel characteristics. Based on the channel characteristics, a control processor calculates a preferred configuration of digital (and optionally, analog) signal processing to best manage the available energy for the present channel characteristics. The selected configuration is then down-loaded into communication modules stored in extra memory during runtime. The communication modules preferably include a one or more of: a reconfigurable forward error correcting codec (with adjustable code lengths and a plurality of code choices); a reconfigurable interleaver with adjustable depth; a decision feedback equalizer (DFE) with a reconfigurable number of taps; maximum likelihood sequence estimator with an adjustable number of states; a frequency hopping coder with an adjustable number of hops or hop rate; and a direct-sequence (or direct sequence spread spectrum) codec with an adjustable number of chips per bit.

WO 02/43341 A2



**Published:**

— without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

METHOD OF RECONFIGURATION OF RADIO PARAMETERS FOR POWER-  
AWARE AND ADAPTIVE COMMUNICATIONS

This application claims the benefit of provisional application number 60/243,707, filed October 26, 2000 and claims priority thereunder.

5      BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to wireless communications generally, and more specifically to power management for radio transceivers that employ digital coding and signal  
10      processing.

Description of the Related Art

Digital radio transceivers employ a variety of digital coding and signal processing methods to achieve communication through noisy and error prone channels. For  
15      example, forward error correction (FEC) and interleaving are both commonly used to compensate for channel fading. Such methods are extremely useful, but they come at a cost: increased power usage.

Consider an exemplary channel with no fading. In such  
20      a case, a simple radio configuration would suffice to achieve a bit error rate BER of 0.001% using binary phase shift keying at a transmit power of one 2.5 dBm over 100 meters with five dBm noise figure, zero dB nominal antenna

gain, and five dBm link margin. In contrast, in the presence of fast fading a transmission can experience an additional 40 dB loss in signal to noise ratio which implies a necessary increase in transmitter power to 52.5 dBm or 178 W. To reduce the required power, most systems employ forward error correction and interleaving to combat the worst case fading scenario. However, such a point solution still results in unnecessary power consumption by the FEC codec and the interleaver in the case where the channel exhibits no fading. For the sake of illustration, assume that an FPGA implementation of a simple BPSK digital modem consumes 10mw; a similar FPGA digital modem with FEC and interleaving would typically dissipate approximately one watt. Thus, if FEC and interleaving are used in all cases, 100 times more than necessary power would be consumed when the channel exhibits no fading.

In some applications unnecessary power consumption can be tolerated. However, many communications applications rely upon limited power sources such as batteries. In such applications a more efficient power management system is greatly to be preferred.

Current wireless systems already manage power to operate with high-energy efficiency and link performance by various means (e.g. power control). However, they are only point solutions and cannot adequately manage their power and performance for highly dynamic operation scenarios and environments.

#### SUMMARY OF THE INVENTION

In view of the above problems, the present invention provides an adaptive, reconfigurable radio architecture that allows software control of the radio signal processing

by reconfiguring digital signal processing modules, and optionally by also reconfiguring analog signal processing modules.

5 The method of the invention monitors a communication channel and estimates its characteristics from time to time, thus providing a dynamic estimate of channel characteristics. Based on the channel characteristics, a control processor calculates a preferred configuration of digital (and optionally, analog) signal processing to best  
10 manage the available energy for the present channel characteristics. The selected configuration is then downloaded into communication modules stored in extra memory during runtime. The communication modules preferably include a one or more of: a reconfigurable forward error  
15 correcting codec (with adjustable code lengths and a plurality of code choices); a reconfigurable interleaver with adjustable depth; a decision feedback equalizer (DFE) with a reconfigurable number of taps; maximum likelihood sequence estimator with an adjustable number of states; a  
20 frequency hopping coder with an adjustable number of hops or hop rate; and a direct-sequence (or direct sequence spread spectrum) codec with an adjustable number of chips per bit. Each module is preferably well characterized so that the amount of energy required per information bit  
25 transmitted and received is known. Each module is adequately parameterized such that different instances may be reconfigured dynamically, in response to commands from the control processor, on a field programmable gate array (FPGA) or other type of reconfigurable hardware to provide  
30 appropriate signal processing for the dynamic channel conditions as measured.

An apparatus in accordance with the invention includes: a channel monitor which produces estimates of the communication channel's characteristics; a programmable

processor arranged to receive estimates from said channel monitor, and programmed to compute preferred signal processing configuration based upon said estimates; at least one reconfigurable digital signal processing module, arranged to receive commands from said programmable processor and to reconfigure in response to said commands; and a radio transceiver, with inputs from said reconfigurable signal processing module and outputs to said reconfigurable signal processor module, for sending and receiving radio signals.

These and other features and advantages of the invention will be apparent to those skilled in the art from the following detailed description of preferred embodiments, taken together with the accompanying drawings, in which:

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of an reconfigurable radio apparatus in accordance with the invention; and

FIG. 2 is a flow diagram of a method in accordance with the invention.

#### DETAILED DESCRIPTION OF THE INVENTION

Common acronyms are used extensively in the following description of the invention. For convenience, the following glossary is provided.

##### Glossary of Acronyms

SNR: signal-to-noise ratio

SIR: signal-to-interference ratio

SINR: signal-to-interference-and-noise ratio



MLSE: maximum likelihood sequence estimator  
DFE: decision feedback equalizer  
FH: frequency hopping  
FHSS: frequency-hop spread-spectrum  
5 DS: direct-sequence  
DSSS: direct-sequence spread spectrum  
SS: spread spectrum  
GMSK: Gaussian minimum shift keying  
CPM: continuous phase modulation  
10 QAM: quadrature amplitude modulation  
RSSI: received signal strength indicator  
BER: bit-error rate  
PER: packet-error rate  
IIP3: input third-order intercept point  
15 RAM: random access memory  
LNA: low noise amplifier  
PA: power amplifier  
NF: noise figure  
FPGA: field programmable gate array  
20 LMS: least mean square  
RLS: recursive least square  
TDMA: time division multiple access  
FDMA: frequency division multiple access  
CDMA: code division multiple access  
25 CIR: channel impulse response  
IS-95 : Interim-Standard 95, a code-division multiple

access standard, developed in the US.

GSM : Global System for Mobile Communications, a TDMA system, developed in Europe.

FIG. 1 shows an apparatus in accordance with the invention. A radio transceiver module 20 is interfaced with a channel monitor 22 which provides estimates of channel conditions to control processor 24 via an interface 26. A plurality of reconfiguration modules are stored in external memory 28. The control processor 24 is programmed with a real time operating system, scheduler and middleware to select an appropriate signal processing radio configuration based upon current channel characteristics. Reconfiguration is accomplished by loading appropriate reconfiguration modules in a reconfigurable signal processor 30. In other words, a configurable signal processing (DSP) module 30 receives commands from the control processor 24 and reconfigures itself in response to such commands. Reconfigurable signal processing module 30 is linked to the radio transceiver 20, analog interface 32 modem 34, and processes the communication signals according to its selected configuration. Suitably, the signal processing module 30 is implemented on an FPGA, but it could also be realized on any reconfigurable hardware or software platform that has provisions to reconfigure its processing for different parameters, as discussed below. Preferably, a power supply condition monitor 38 is also provided to inform the control processor 24 of the current power supply conditions.

The modules stored in 28 (and implemented on signal processor 30) include one or more of the following:

- a) DFE with reconfigurable number of taps
- b) MLSE with reconfigurable number of states
- c) Rake with reconfigurable number of fingers
- d) Modulators with reconfigurable modulation types (e.g. GMSK, QAM, CPM, FSK) and constellation sizes.
- e) FH transceivers with reconfigurable number of hops and hop rate
- f) DS transceiver with reconfigurable number of chips per bit (i.e. processing gain).
- g) Interleaver with reconfigurable depth and span, and types (e.g. convolutional or block).
- h) FEC with reconfigurable code rate and types (e.g. block code, convolutional code, turbo code).

In a typical embodiment of the invention the reconfigurable signal processor module 30 is preferably realized using a field programmable gate array (FPGA) circuit. The method of the invention is not limited to only FPGA implementations but could of also be applied to any reconfigurable hardware platform that has provisions to reconfigure its processing for different parameters such as code rate, data rate, bandwidth, etc.. In fact, adaptive reconfiguration of analog RF front end circuits could also be applied optionally for additional power savings.

An apparatus substantially as described is suitable for carrying out the method of the invention, as described below, for reconfiguring radio parameters for adapting radio performance to meet a given operation requirement (typically efficient power management).

The method of the invention, as shown in FIG. 2, is suitably executed under program control in software running

on the control processor 24 (shown in FIG. 1). First (in step 50), the channel monitor 22 estimates channel characteristics based on current conditions of the communication channel. The details of suitable methods of estimation are discussed below in connection with table 1 and the more detailed description of the channel monitor 22.

Next (in step 52), based on the estimates of the channel impulse response, parameters of the reconfigurable signal processing blocks (stored in 28) are set to mitigate frequency selective fading. Such parameters preferably would include a decision feedback equalizers, a maximum likelihood sequence equalizer is, and the number of fingers on it a rake receiver. The parameters should be set according to the delay spread of the channel. The delay spread is determined from  $\hat{h}(t)$  by setting a system adjustable threshold over which signal power is not considered in determining the time dispersion of the transmitted signal. For instance, the number of fingers in a Rake receiver could be set to span the delay spread of the channel; the MLSE could have the number of states determined by  $2^{L+1}$  where  $L+1$  is the length of the delay spread normalized to the symbol rate; and the number of taps in the DFE could be set to the length of the delay spread normalized to the symbol rate.

Next (step 54), Based on the estimated SIR, SNR, and SINR set parameters on the reconfigurable blocks that could mitigate interference and/or time-selective fading: including but not limited to interleaver, forward-error correction codec, frequency-hop transceiver, and direct-sequence spread-spectrum transceiver. Table 1 illustrates a

possible set of constraints by which the SIR and SNR estimate could be used to determine the settings for the relevant reconfigurable blocks. Table 1 however does not represent the only method to determine the setting on the control parameters. Other control flow based on the channel estimates could be realized depending on the overall system requirements. For instance, it is also possible to do a relative comparison of the SIR and SNR for the cases where SIR is high and SNR is low or SIR is low and SNR is high. Note that thresholds V1 through V18 are adjustable parameters depending on the reconfigurable blocks used. Generally, V3-V6 are selected to be the region in which the BER performance meets the operational requirement at a given time.

**Table 1 A possible constraint to direct the  
adjustment of reconfigurable parameters (in step  
54)**

SIR Constraint	SNR Constraint	Control Adjustments
High value: $SIR > V1$ (Row 1)	High value: $SNR > V2$	<p>Proceed sequentially with the following adjustments. Note that sequencing depends on the system constraint being optimized and operational requirements. Thus, this is one possible sequencing that places higher priority on low power dissipation. Note that small steps should be used to decrease the parameters in this state so as to avoid a deadlock situation.</p> <ul style="list-style-type: none"> <li>• Decrease transmit power</li> <li>• Increase NF and/or data rate</li> </ul> <p>Perform the following until SIR falls between <math>V3</math> and <math>V4</math>:</p> <ul style="list-style-type: none"> <li>• Decrease chips/bit if DS mode is on</li> <li>• Decrease hop rate and/or number of hopping frequencies.</li> <li>• Decrease interleaver depth and span.</li> </ul> <p>If SNR is still higher than <math>V2</math>, then perform the following until SNR falls between <math>V5</math> and <math>V6</math>:</p> <ul style="list-style-type: none"> <li>• Decrease hop rate and/or number of hopping frequencies.</li> <li>• Decrease interleaver depth and span accordingly</li> <li>• Increase code rate</li> <li>• Decrease interleaver depth and span accordingly</li> </ul> <p>If either SIR or SNR falls in conditions described in rows 3-5 then controls will transfer to the control procedure of the</p>

		corresponding row.
High value: $V3 \leq SIR \leq V4$ (Row 2)	High value: $V5 \leq SNR \leq V6$	Maintain current setting and go to step 60
High value: $V7 \leq SIR \leq V8$ (Row 3)	Low value: $V9 \leq SNR \leq V10$	Decrease coding rate Increase interleaving depth Frequency hop (increase hop rate) Go to Step 56 if all parameter adjustment has reached limits imposed by the underlying reconfigurable blocks.
Low value: $V11 \leq SIR \leq V12$ (Row 4)	High value: $V13 \leq SNR \leq V14$	Frequency hop (increase hope rate and hopping frequencies). Adjust interleaving depth accordingly. Direct-sequence (increase chips per bit) Go to Step 56 if all parameter adjustment has reached limits imposed by the underlying reconfigurable blocks.
Low value: $SIR < V15$ (Row 5)	Low value: $SNR < V16$	Perform control adjustments described in rows three and four of this table currently and repeat step 54. Go to row 3 if all parameter adjustment has reached limits imposed by the underlying reconfigurable blocks.

Note that in the control settings applied in the cases represented by the third, fourth, and fifth rows of the Table 1), the control settings could be adjusted sequentially. For instance, in the case of high SIR and low SNR, the preferred method is to decrease coding rate first before increasing the interleaving depth. It is also possible to adjust the settings according to the estimated fading duration and fading rate based on simple rules, such

as "choose an interleaver depth that is greater than the fading duration." Row three is repeated until either constraint in row two is met or until parameter adjustment has reached the range limit supported by the underlying reconfigurable blocks. In the former case, the control is transferred to step 60 and in the latter case control is transferred to step 56. If only estimates on SINR are available, then rows three and fourth are combined. That is the condition would be

$$V17 \leq SINR \leq V18.$$

Next, in step 56, RSSI is used to adapt data rate (analog front-end bandwidth) and noise figure of the RF front-end. If  $RSSI \geq V19$  and SIR falls between V11 to V12 or is less than V15 then increase NF until NF cannot increase any further or when SIR is raised to between V3 and V4 or greater than V1. Next if SNR is between V9 and V10 or less than V16 then decrease data rate or decrease NF until NF or data rate cannot be decreased any further or until SNR is raised to between V5 and V6 or greater than V2. If either SNR or SIR still do not meet the operational requirement; i.e. within ranges specified in rows 1 and 2 of Table 1, then go to step 4.

Next, in step 58, transmit power is increased until a condition in the first or second row in Table 1 is met. If that condition is not met after highest transmit power possible is used then the method declares link failure. A transition to Step 54 or 56 should occur anytime the conditions described in rows 1-2 of Table 1 are met.

In step 60, adjustment is refined according to BER with same set of controls as portrayed in steps 1-4 but now with SIR/SNR replaced by BER. The following regions will be used to perform fine adjustments:



Table 2 A possible constraint to direct the fine adjustment of reconfigurable parameters

BER constraint	Control Adjustments
$BER > V20$	Same as row 1 of Table 2.
$V21 \leq BER \leq V22$	Same as row 2 of Table 2.
$V23 \leq BER \leq V24$	Combine row 3 and 4 of Table 2
$BER < V25$	Same as row 4 of Table 2

The control is transferred back to steps 54, 56 or 58 if SIR falls outside of the range set by V3 and V4 or SNR falls outside of the range set by V5 and V6. The steps described above may also be thought of as states of a control algorithm.

While power is not explicitly mentioned in the reconfiguration procedure just described, it can be imposed at any time subject to the battery level indicator and estimates of the amount of energy required for the current and/or future configurations. If the battery level drops below a critical level, V26, then the system could either relax the performance constraint such that a lower power configuration could be obtained or enter a sleep/standby mode and only wakes up when critical task must be performed. In other words, the sleep mode is a means that the system could conserve the power so that it could still perform several critical communications before the battery dies out. A possible scenario involving reconfiguration of choice in PA type and modulation type was described in the approach section.

Also, separate from the main control loop, other independent control loops could be run to control reasonable independent parameters. The specific parameters would depend on the reconfigurable blocks available in the radio and the particular system application. For instance, as described earlier in the approach section, a control loop could be implemented that has two states, a normal state and an emergency state, where during the normal state when the battery level is above V26, GMSK modulation with non-linear amplification is used. However, as the battery level drops below V26 high order QAM modulation with linear amplification is used. Note that this control loop does not prevent the main control loop from utilizing the reconfigurable PA or reconfigurable modulator. For instance, the main loop could still adjust the data rate, if desired, by changing the constellation size.

Finally, in step 62, after the control processor has selected the most appropriate signal processing configuration and set parameters of the stored modules (stored in storage 28), the configuration is downloaded by command into the programmable signal processing hardware module 30, which controls the radio signal processing. From time to time, the estimate is refreshed and the method repeats, looping back via return path 64.

Methods of Estimating channel characteristics:

Typical and suitable channel monitors can be summarized as follows:

Table 3. Summary of Channel Monitors	
Channel Monitors	Function
Signal-to-Noise Ratio (SNR)	Provides a fast estimation of SNR from which BER can be inferred. Based on this estimate the system can adapt the modulation order and the amount of error correction.
Bit Error Rate (BER)	Provides a direct but slow estimation of BER. The BER monitor can be used in conjunction with the SNR monitor to obtain a more accurate estimate of BER.
Received Signal Strength Indicator (RSSI)	Provides a fast estimation of the total received signal power and allows the system to adapt transmission power and noise figure. The SNR and BER monitors can be used jointly with RSSI for more precise adaptation.
Channel Impulse Response (CIR)	Provides an estimation of the multipath profile in the channel and allows the system to determine the amount of equalization required, e.g. number of Rake fingers.
Doppler Shift	Provides a fading rate estimation and allows the system to determine the amount of error correction and depth of the interleaver required.

5 Estimates for these parameters can be calculated by the following methods, although the method of the invention is not limited and to specific methods of estimation.

SIR, SNR, SINR:

If there are numerous interferers and especially if they are orthogonal to each other and to the desired signal then the following two methods could be applied to obtain an estimate of the signal-to-interference-and-noise ratio (SINR). Orthogonality approximation holds for code-division multiple access (CDMA) system. Note that other methods well known in the art can also be applied.

Assume a received signal:  $r(t) = A(t)c(t) + i(t) + n(t)$  where  $A(t)$  is the amplitude,  $c(t)$  is the desired signal (or user code if CDMA),  $i(t)$  is the interference, and  $n(t)$  is the noise process. then

SINR:  $SINR = \frac{|\hat{A}(t)|^2}{\sigma_N^2 + \sigma_I^2}$  where  $\hat{A}(t)$  is the estimated amplitude, and  $\sigma_N^2$  and  $\sigma_I^2$  are the variances of the noise and interference signal respectively.

Method 1:

$$\hat{A}(t) = \frac{\int r(t)c^*(t)dt}{\int |c(t)|^2 dt}$$

$$\sigma_N^2 + \sigma_I^2 = |r(t) - \hat{A}(t)c(t)|^2$$

$c^*(t)$  denotes complex conjugate.

Method 2:

$$\hat{A}(t) = E\{|r(t)|\}$$

$$\sigma_N^2 + \sigma_I^2 = (|r(t)| - E\{|r(t)|\})^2$$

$E\{\}$  denotes the mean operator.

The following alternative methods could be applied in systems with few interferers, such as TDMA or FDMA. Assume a Received signal:  $r(t) = A(t)s(t) + I(t)g(t) + n(t)$  where  $s(t)$  is the pulse shaping used by the desired signal and  $g(t)$  is that used by the interferers. The SNR and SIR could be estimated by

$$SNR = \frac{|\hat{A}(t)|^2}{\sigma_N^2}$$

$$SIR = \frac{|\hat{A}(t)|^2}{\sigma_I^2}$$

The parameters needed for the estimation of SNR and SIR are derived by the following equations:

$$\sigma_N^2 = (|r(t)| - E\{|r(t)|\})^2$$

$$\hat{A}(t) = \frac{\int r(t)s^*(t)dt}{\int |s(t)|^2 dt}$$

$$x(t) = |r(t) - \hat{A}(t)s(t)|^2$$

$$\sigma_I^2 = x(t) - \sigma_N^2$$

#### Implementation Issues:

The above two methods could be implemented in the digital domain using datapath components well-known in the art, such as multipliers and adders. Certain simplifications could be achieved to eliminate division operations. For instance, the division needed to estimate the amplitude can be avoided by assuming that the filtered

signal energy is a constant. Also, the division in the SNR and SIR computation can be eliminated by computing the estimates in units of dB and the log function can be implemented by approximation methods, such as power series, or by table loop up.

The inputs to the estimator could be based on pilot symbols or entire packets. Prediction of future SIR and/or SNR values could be implemented by using the LMS or RLS to train filter coefficients of the predictor implemented as a filter, e.g. auto-regressive. Kalman filtering techniques could also be employed. Prediction allows more time for the system to respond to changes in the channel parameters. In the simplest case, simple single pole filter with a forgetting factor or an FIR filter with windowing function (e.g. exponentially weighted) could also be used to obtain an average of the SIR or SNR. The predicted and/or weighted estimates would be used in the reconfiguration control discussed later.

#### Channel Impulse Response Estimation:

Once again, we assume a Received signal:  $r(t) = h(t) * c(t) + I(t)g(t) + n(t)$  where  $h(t)$  is the channel impulse response. Two methods are described though other techniques could also be employed.

In the first method channel impulse response is estimated according to the equation:

$$1) \hat{h}(t) = r(t) * c^*(-t)$$

In the second method Frequency domain response is estimated by means of pilot tones, which are well-known in

the art. The channel response in the time domain is derived with an inverse FFT.

Note that to include the effect of  $h(t)$  in SIR and SNR we can use  $\hat{h}(t)$  in the estimations of SIR and SNR described above.

In particular,  $s(t)*\hat{h}(t)$  or  $c(t)*\hat{h}(t)$  would be used throughout in the estimation process instead of  $s(t)$  or  $c(t)$ , respectively.

#### RSSI Estimation:

Received signal strength is readily calculated according to:

$$RSSI = |r(t)|^2$$

#### BER/PER Estimation:

Packet error rate (PER) can be estimated by estimating the number of times a packet is in error given a total number of packets sent. The error detection can be accomplished with an error detecting code, well known in the art, such as CRC.

The BER can be estimated from the PER as follows:

In one method, BER is calculated according to:

$$BER = 1 - (1 - PER)^{1/L}$$

In an alternate method, BER can be calculated by:

$$PER/L \leq BER \leq PER$$

Other schemes are also possible. For example, the BER inferred from a syndrome obtained in a block code can be inferred from a Viterbi cumulative metric, decoder, or inferred from the extrinsic/intrinsic metrics of a turbo codec.

*Doppler Shift Estimation:*

Any of several known methods can be used to estimate velocity. For example, the apparatus can estimate velocity with on-board inertial sensors. alternatively, it could estimate velocity vector with on-board GPS and Kalman tracking. as another method, the apparatus could estimate fading duration and period of fade by sending out a series of small packets back-to-back and determine the loss statistics. A Large number of losses indicate a fade.

As yet another method, it is possible to estimate fading rate by means of a predictor similar to the predictor for SNR/SIR, except that in this case the signal power at the RF front-end is used as input to the predictor. The predictor filter coefficient will converge and generate fading time series from which the fading duration and fade period can be determined. Fading duration and fade period can be used to estimate the Doppler shift. More importantly, with respect to the reconfiguration control the parameters of interest are actually the fade period and fading duration. The received RF signal can be estimated by the following

$$\text{Received input power} = \frac{|\hat{A}(t)|^2}{2|Z_{in}|^2 G_{RF}}$$

where  $Z_{in}$  is the input impedance of the RF front-end and  $G_{RF}$  is the total power gain of the RF front-end at the time the estimate is performed.

Note that it is possible to set a threshold  $V_{30}$  such that when the Received input power goes below it, the signal is said to be in a fade. In this way, the fading



period and fade duration can be estimated by noting the amount of time the signal is below the threshold V30. Predictor could be avoided in this case.

5        While several illustrative embodiments of the invention have been shown and described, numerous variations and alternate embodiments will occur to those skilled in the art. Such variations and alternate  
10        embodiments are contemplated, and can be made without departing from the spirit and scope of the invention as defined in the appended claims.

**I CLAIM:**

1. A method of adaptively reconfiguring a radio architecture for power efficient or adaptive communications based on communication channel conditions, suitable for use in a reconfigurable radio which allows control of reconfigurable digital signal processing blocks with adjustable parameters, comprising the steps of:

estimating the signal to noise ratio (SNR) and signal-to-interference ration (SIR) based on a channel monitor;

estimating the channel impulse response;

based on the estimate of the channel impulse response, setting parameters of the reconfigurable digital signal processing blocks to mitigate frequency selective fading;

based on the estimates of SIR and SNR, setting additional parameters of the reconfigurable digital signal processing blocks to mitigate interference, noise and time selective fading.

2. The method of claim 1, wherein said step of setting parameters of the reconfigurable digital signal processing blocks comprises:

determining a delay spread from said channel impulse response by setting a system adjustable threshold over which signal power is not considered in determining a time dispersion of a signal; and

setting the number of taps in a decision feedback equalizer (DFE).

3. The method of claim 1, wherein said sep of setting parameters of the reconfigurable digital signal processing blocks comprises:

5        adjusting the number of states of a maximum likelihood sequence equalizer with a reconfigurable number of states.

4.    The method of claim 1, wherein said step of setting parameters of the reconfigurable digital signal processing blocks further comprises:

Setting the number of fingers in a rake receiver.

5.    The method of claim 1, wherein said step of setting additional parameters of the reconfigurable digital signal processing blocks comprises:

5        based on the estimated SIR and SNR, setting the code rate of a forward-error correction codec.

6.    The method of claim 1, wherein said step of setting additional parameters of the reconfigurable digital signal processing blocks comprises reconfiguring a forward error correction codec.

7.    The method of claim 6, wherein said FEC codec is wherein said forward error correction codec is reconfigurable to enabled or disabled states.

8.    The method of claim 6 wherein said forward error correction codec is configurable to more than one code type.

9.    The method of claim 1, wherein said step of setting additional parameters of the reconfigurable digital signal processing blocks further comprises:

5            setting the depth of an interleaver with a  
reconfigurable depth.

10. The method of claim 1, wherein said step of  
setting additional parameters of the reconfigurable digital  
signal processing blocks comprises reconfiguring a  
frequency hopping module with reconfigurable number of hops  
5            and hopping rate.

11. The method of claim 1, wherein said step of  
setting additional parameters of the reconfigurable digital  
signal processing blocks further comprises:

5            reconfiguring the number of chips per bit of a  
reconfigurable direct sequencing spread spectrum processing  
module.

12. The method of claim 1, wherein said steps of  
reconfiguring setting the parameters and setting the  
additional parameters of the reconfigurable signal  
processing blocks comprise programming a field programmable  
5            gate array (FPGA) circuit.

13. A digital radio capable of adaptively  
reconfiguring in response to changes in the characteristics  
of a communication channel, comprising:

5            a channel monitor which produces estimates of the  
communication channel's characteristics;

            a programmable processor arranged to receive estimates  
from said channel monitor, and programmed to compute  
preferred signal processing configuration based upon said  
estimates;

10           at least one reconfigurable digital signal processing  
module, arranged to receive commands from said programmable  
processor and to reconfigure in response to said commands;  
          a radio transceiver, with inputs from said  
reconfigurable signal processing module and outputs to said  
15       reconfigurable signal processor module, for sending and  
receiving radio signals.

14. The digital radio of claim 13, wherein said  
reconfigurable digital signal processing module comprises a  
forward error correction (FEC) codec.

15. The digital radio of claim 14, wherein said  
reconfigurable FEC codec is reconfigurable to enabled or  
disabled states in response to commands from said  
programmable processor.

16. The digital radio of claim 15, wherein said  
reconfigurable FEC codec is further reconfigurable to any  
of a plurality of codes, in response to commands from said  
processor.

17. The digital radio of claim 13, wherein said  
reconfigurable digital signal processing module comprises a  
decision feedback equalizer with an adjustable number of  
taps, wherein said number of taps is adjustable in  
5       response to commands from said processor.

18. The digital radio of claim 13, wherein said  
reconfigurable digital signal processing module comprises a

maximum likelihood sequence equalizer with a reconfigurable number of states.

19. The digital radio of claim 13, wherein said reconfigurable digital signal processing module comprises an interleaver with a reconfigurable depth.

20. The digital radio of claim 13, wherein said reconfigurable digital signal processing module comprises a frequency hopping module with reconfigurable number of hops and hopping rate.

21. The digital radio of claim 13, wherein said reconfigurable digital signal processing module comprises a reconfigurable direct sequencing spread spectrum processing module with an adjustable number of chips per bit.

22. The digital radio of claim 13, wherein said reconfigurable digital signal processing module comprises a field programmable gate array circuit, interfaced to said processor and arranged to reconfigure in response to commands from said processor.

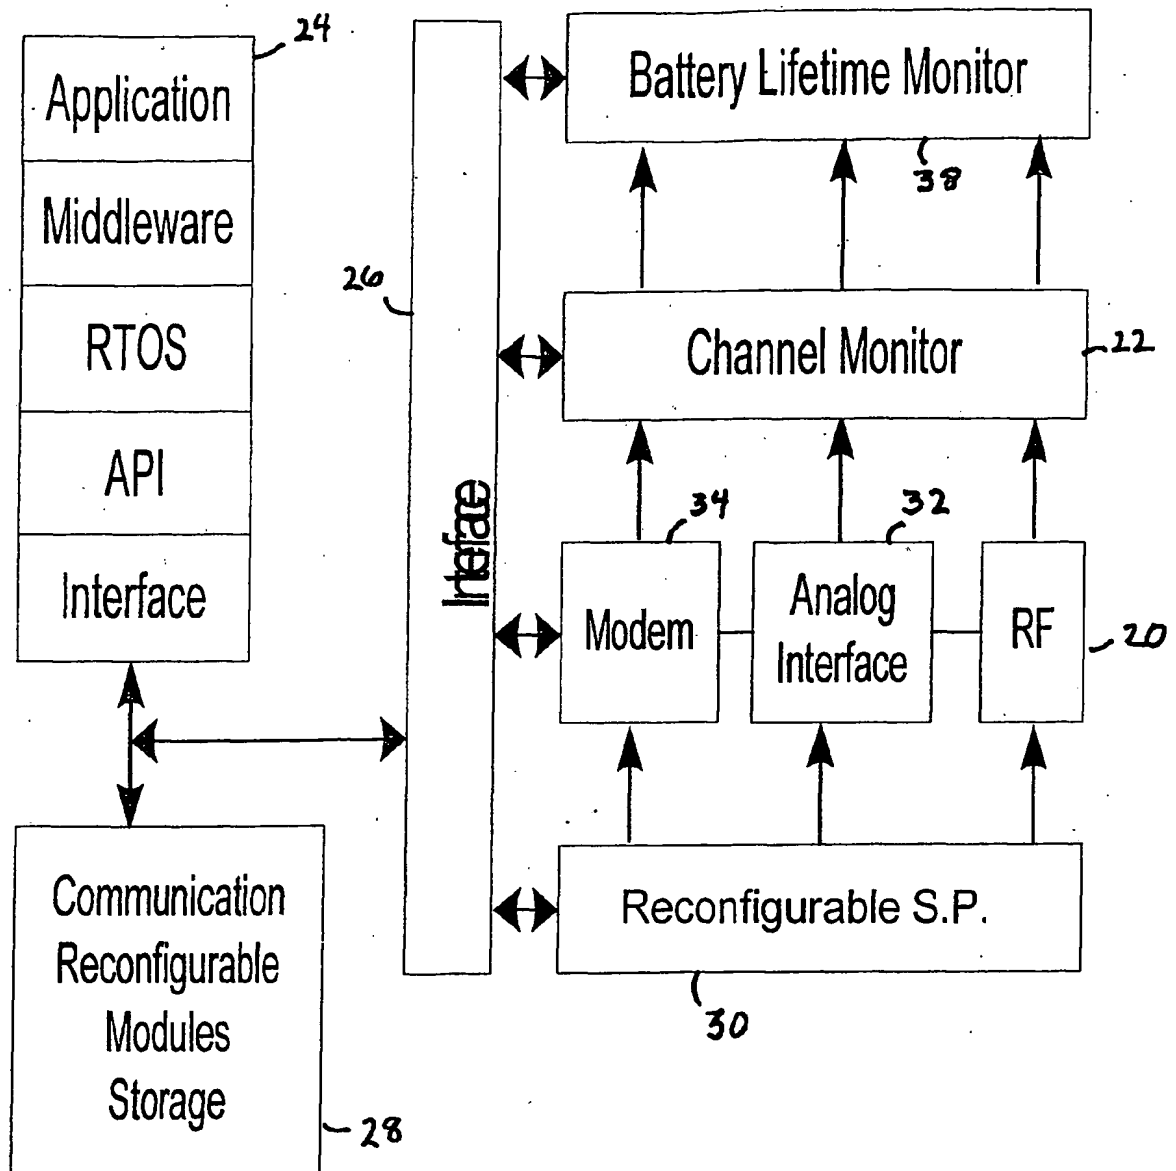


FIG. 1

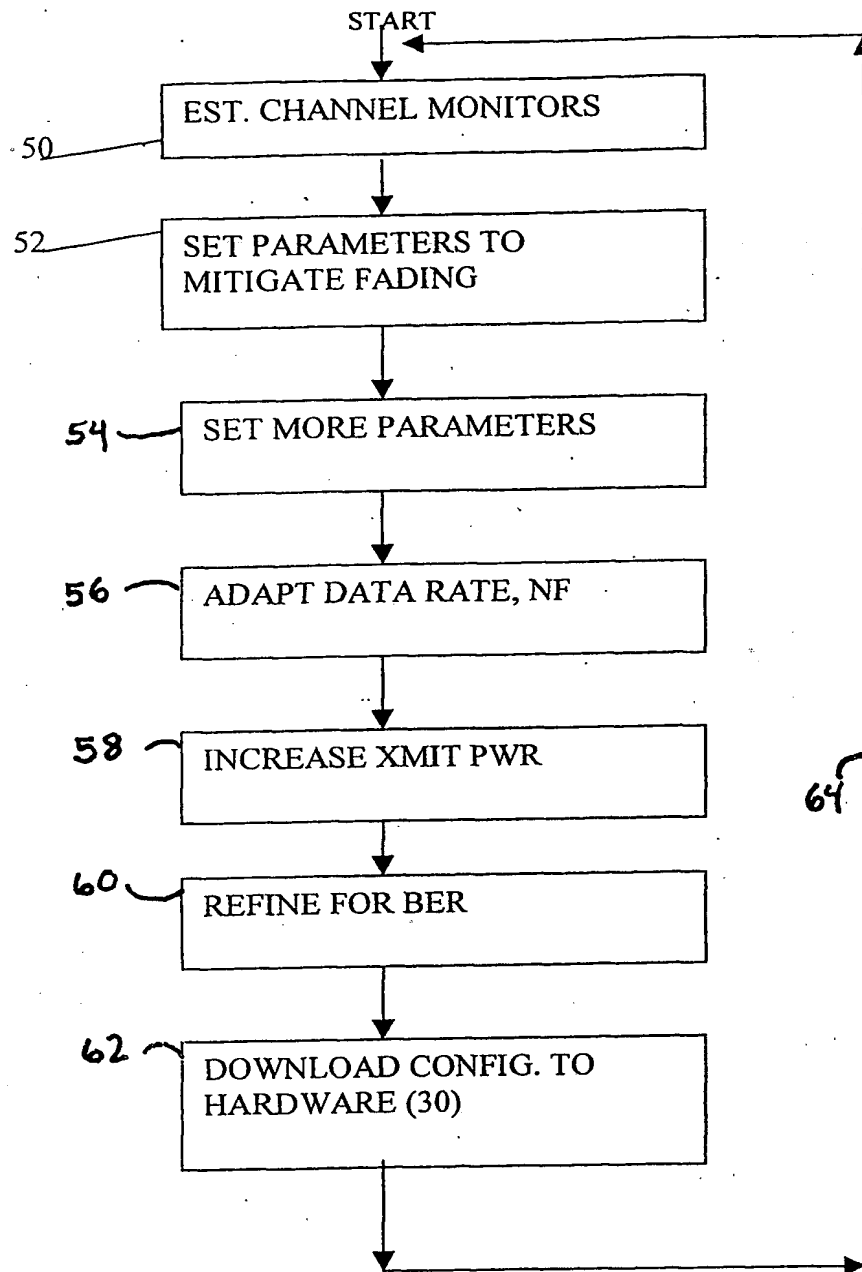


FIG. 2



(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
30 May 2002 (30.05.2002)


PCT

(10) International Publication Number  
**WO 02/043341 A3**

- (51) International Patent Classification<sup>7</sup>: **H04L 25/02**, 25/03, 1/00, 1/20, H04B 7/005 (72) Inventor: **CHIEN, Charles**; 673 Camino Del Sol, Newbury Park, CA 91320 (US).
- (21) International Application Number: PCT/US01/47698 (74) Agents: **JOHNSON, William, L.** et al.; Koppel & Jacobs, Suite 107, 555 St. Charles Drive, Thousand Oaks, CA 91360 (US).
- (22) International Filing Date: 26 October 2001 (26.10.2001)
- (25) Filing Language: English (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (26) Publication Language: English
- (30) Priority Data:  
60/243,707 26 October 2000 (26.10.2000) US  
10/055,261 25 October 2001 (25.10.2001) US
- (71) Applicant: **INNOVATIVE TECHNOLOGY LICENSING, LLC** [US/US]; Mail Code A15, P.O. Box 1085, Thousand Oaks, CA 91358-0085 (US). (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: METHOD OF RECONFIGURATION OF RADIO PARAMETERS BASED ON COMMUNICATION CHANNEL MONITORING

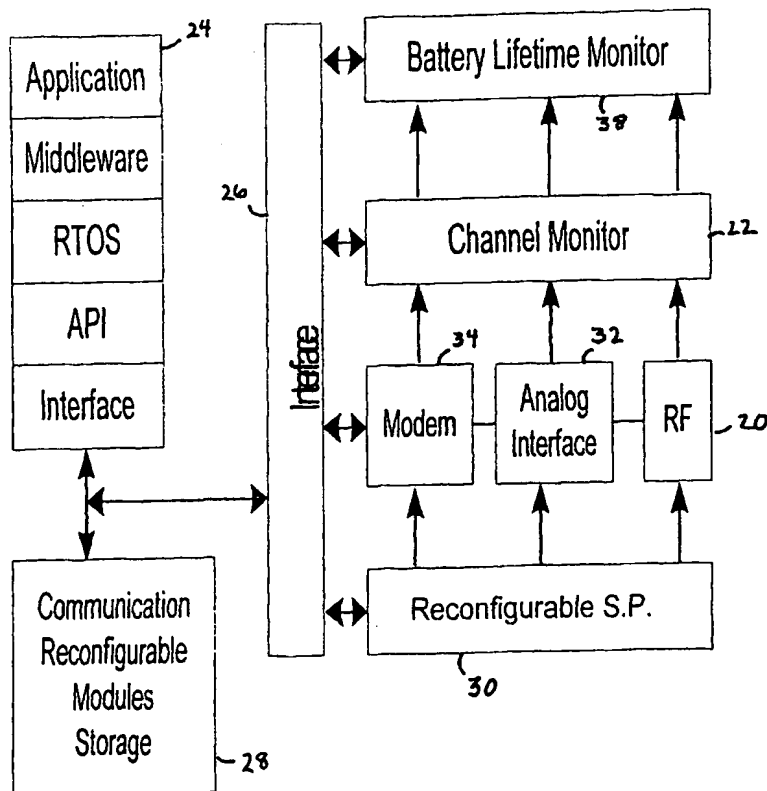

(57) Abstract: The invention monitors a communication channel and estimates its characteristics from time to time, thus providing a dynamic estimate of channel characteristics. Based on the channel characteristics, a control processor calculates a preferred configuration of digital (and optionally, analog) signal processing to best manage the available energy for the present channel characteristics. The selected configuration is then down-loaded into communication modules stored in extra memory during runtime. The communication modules preferably include a one or more of: a reconfigurable forward error correcting codec (with adjustable code lengths and a plurality of code choices); a reconfigurable interleaver with adjustable depth; a decision feedback equalizer (DFE) with a reconfigurable number of taps; maximum likelihood sequence estimator with an adjustable number of states; a frequency hopping coder with an adjustable number of hops or hop rate; and a direct-sequence (or direct sequence spread spectrum) codec with an adjustable number of chips per bit.

WO 02/043341 A3



patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:  
27 February 2003

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

Intern Application No  
PCT/US 01/47698

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L25/02 H04L25/03 H04L1/00 H04L1/20 H04B7/005

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC, COMPENDEX

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 128 494 A (ROZMARYN JACOB) 3 October 2000 (2000-10-03)	13
Y	column 2, line 30-37 column 3, line 24 - line 49 ---	1, 12, 22
X	WO 00 48332 A (ERICSSON TELEFON AB L M) 17 August 2000 (2000-08-17)	13
Y	page 1, line 3-6 page 1, line 16 - line 23 page 4, line 1 - page 10, line 23 page 13, line 5 - page 16, line 7 --- -/--	1, 12, 22

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

4 July 2002

Date of mailing of the international search report

01/08/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Schiffer, A

## INTERNATIONAL SEARCH REPORT

Intern Application No

PCT/US 01/47698

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 594 946 A (MENICH BARRY J ET AL) 14 January 1997 (1997-01-14)	13
A	column 2, line 44 - line 59 column 3, line 16 - line 58 column 4, line 37 - line 65	1,12,22
A	PROAKIS: "Digital Communications", DIGITAL COMMUNICATIONS, ELECTRICAL AND COMPUTER ENGINEERING. COMMUNICATIONS AND SIGNAL PROCESSING, NEW YORK, NY: MCGRAW-HILL, US XP002202678 ISBN: 0-07-113814-5 page 249, paragraph 5.1.4 -page 254 page 468, paragraph 8.1.9 -page 470 page 621, paragraph 10.3 -page 627 page 649, paragraph 11.2 -page 654, paragraph 11.3 page 698, paragraph 13.2 -page 702 page 729, paragraph 13.3 -page 732 page 797, paragraph 14.5.2 -page 806, paragraph 14.5.3	1-22
A	US 6 044 485 A (DENT PAUL WILKINSON ET AL) 28 March 2000 (2000-03-28) column 1, line 31-34 column 1, line 54 - line 59 column 2, line 11 - line 24 column 3, line 51 -column 4, line 31	1,5-8, 13-16

# INTERNATIONAL SEARCH REPORT

tion on patent family members

Intern: Application No

PCT/US 01/47698

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6128494	A	03-10-2000	NONE	
WO 0048332	A	17-08-2000	AU 2953200 A CN 1346547 T EP 1151553 A1 WO 0048332 A1 TR 200102293 T2	29-08-2000 24-04-2002 07-11-2001 17-08-2000 21-01-2002
US 5594946	A	14-01-1997	AU 678943 B2 AU 5414796 A CA 2187326 A1 EP 0758505 A1 FI 964292 A IL 116868 A JP 9512694 T WO 9627246 A1	12-06-1997 18-09-1996 06-09-1996 19-02-1997 25-10-1996 12-03-1999 16-12-1997 06-09-1996
US 6044485	A	28-03-2000	AU 5593898 A BR 9714249 A CN 1249092 A EP 0950301 A1 JP 2001507886 T WO 9829979 A1	31-07-1998 18-04-2000 29-03-2000 20-10-1999 12-06-2001 09-07-1998

**THIS PAGE BLANK (USPTO)**

CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
30 May 2002 (30.05.2002)


PCT

(10) International Publication Number  
WO 02/043341 A3

- (51) International Patent Classification<sup>7</sup>: H04L 25/02, 25/03, 1/00, 1/20, H04B 7/005
- (72) Inventor: CHIEN, Charles; 673 Camino Del Sol, Newbury Park, CA 91320 (US).
- (21) International Application Number: PCT/US01/47698
- (74) Agents: JOHNSON, William, L. et al.; Koppel & Jacobs, Suite 107, 555 St. Charles Drive, Thousand Oaks, CA 91360 (US).
- (22) International Filing Date: 26 October 2001 (26.10.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/243,707 26 October 2000 (26.10.2000) US  
10/055,261 25 October 2001 (25.10.2001) US
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (71) Applicant: INNOVATIVE TECHNOLOGY LICENSING, LLC [US/US]; Mail Code A15, P.O. Box 1085, Thousand Oaks, CA 91358-0085 (US).

[Continued on next page]

(54) Title: METHOD OF RECONFIGURATION OF RADIO PARAMETERS BASED ON COMMUNICATION CHANNEL MONITORING

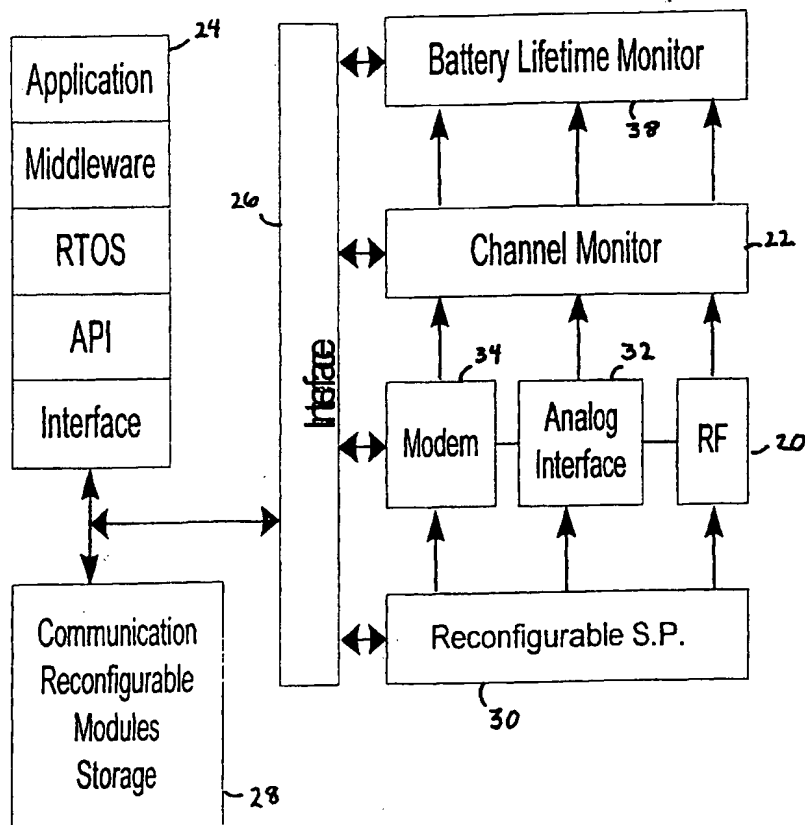

(57) Abstract: The invention monitors a communication channel and estimates its characteristics from time to time, thus providing a dynamic estimate of channel characteristics. Based on the channel characteristics, a control processor calculates a preferred configuration of digital (and optionally, analog) signal processing to best manage the available energy for the present channel characteristics. The selected configuration is then down-loaded into communication modules stored in extra memory during runtime. The communication modules preferably include a one or more of: a reconfigurable forward error correcting codec (with adjustable code lengths and a plurality of code choices); a reconfigurable interleaver with adjustable depth; a decision feedback equalizer (DFE) with a reconfigurable number of taps; maximum likelihood sequence estimator with an adjustable number of states; a frequency hopping coder with an adjustable number of hops or hop rate; and a direct-sequence (or direct sequence spread spectrum) codec with an adjustable number of chips per bit.

WO 02/043341 A3



(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) **Date of publication of the international search report:**  
27 February 2003

(48) **Date of publication of this corrected version:**  
3 April 2003

(15) **Information about Correction:**  
see PCT Gazette No. 14/2003 of 3 April 2003, Section II

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*